


# HIGH PRESSURE MACHINE . NOSO MX 206



Machine with motorized top roller and pressure up to 35 kg for taping or waterproofing very thick overlapping fabrics and seams.



**HEAT HAS NEVER BEEN SO GREEN**  
less consumption, better efficiency

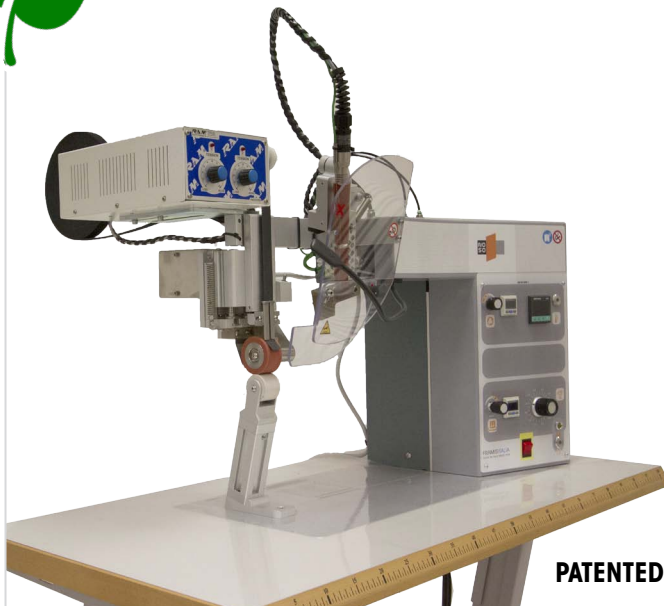

## MACHINE KEY FEATURES

- Pressure up to 35 kg. with top adhesion and waterproofing performance
- Motorized top roller for overlepping seams or thick fabrics
- Garments can be taped both open and closed
- It can deal also with curves
- Moldable roller
- High speed
- Even heat distribution
- No scorched fabrics
- Top quality components
- Low and easy maintenance
- Tapes of different quality and widths can be used


## TECHNOLOGY



LW 302 . TAPING TO RESTORE IMPERMEABILITY



LW 301 . DECORATIVE TAPING



LW 303 . REINFORCEMENT TAPING

## APPLICATIONS



FRAMISITALIA

**ISO 9001** BONDING TECHNOLOGY

# HIGH PRESSURE MACHINE . NOSO MX 206

## TECHNICAL IMPROVEMENT

- .increase adhesion
- .increase speed
- .increase production
- .reduce thermal stress of the machine
- .reduce thermal stress on the fabric
- .minimize electricity consumption
- .greater performance with less quantity of air improving also the comfort for the operator
- .standby mode



HEAT HAS NEVER BEEN SO GREEN  
less consumption, better efficiency



## BASE MACHINE DESCRIPTION

- .base machine with 1 heater
- .spot lamp
- .drawer
- .vertical roll support
- .tensioner metering device
- .teflon down wheel 30mm
- .silicone rubber wheel group 25 mm-35SH (soft)
- .nozzle 30 mm
- .vertical Arm Neutral gear
- .protection screen
- .white table with beech borders 120x60x4
- .table support structure
- .pedals
- .16A 3 poles socket
- .tape guide 20x1 mm
- .screwdriver 2,5
- . Manual

## TECHNICAL INFO FOR INSTALLATION

### Dimension and weight

h. 1100 x 550 x H.1550 mm - 80 Kg

### Pneumatic connection - all connections on the left side

Fast junction diam 8 mm

Maximum air flow: 80 l/min - average consumption: 45 to 55 l/min

Input air pressure: 5.5 bar (0.55 MPa)

Air quality: dry air in accordance to DIN 8573-1 with dew point + 3° C not lubricated

### Electric connection

Nominal voltage: 230 Vac

Nominal frequency: 50 Hz / 60 Hz

Nominal power requirements: 1400 W

## THE LOWEST CONSUMPTION IN THE WORLD OF BONDING

Average consumption for standard applications

Electricity consumption: 0.45 kw/h - CO<sub>2</sub> emission: 129 gr/h - Compressed air consumption: 45 to 55 l/min

The machines complies to technical rulings: Machinery Directive 2006/42/CE, Electromagnetic Compatibility CEE 2004/108/CE and CEI EN 60204-1:2006, Low Tension Directive 2006/95/CE, UNI EN 414:2002, UNI EN ISO 12100:2010, UNI EN ISO 13857:2008, UNI EN ISO 13850:2007, UNI EN ISO 11202:2007

**FRAMISITALIA**  
ITALY · HONG KONG · USA

FRAMIS ITALIA SpA . Via dell'Agricoltura 9/15 - 20083 Vigano di Gaggiano - Milan - Italy - [www.framis.it](http://www.framis.it)

FRAMIS ITALIA HK . Ltd Unit G on 7/f - Kwai Shun Industrial Centre - No. 51-63 Container Port Road - Kwai Chung - New Territories - Hong Kong