



ULTRASONIC MACHINE . NOSO MU 280




Our ultrasonic sewfree sewing machine featuring flexible roller, long time operation, longwearing, and longer life span.

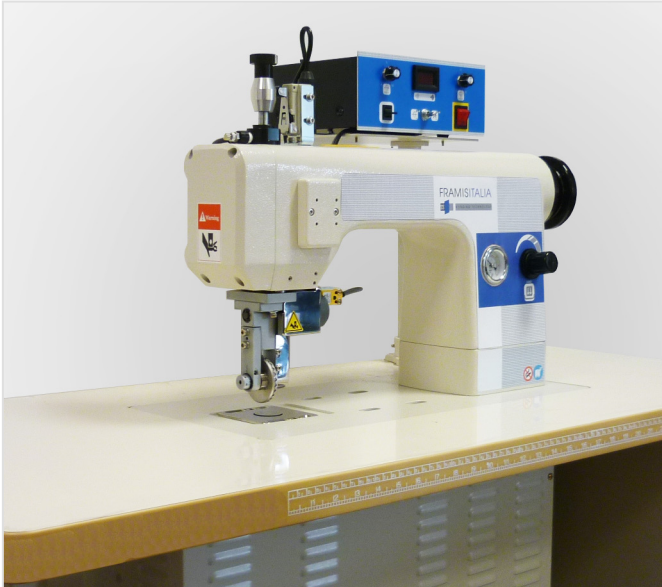

MACHINE KEY FEATURES

- User-friendly
- Can handle gathering
- Clean cut
- It can deal also with curves
- High speed
- Roller can be changed according to different patterns and sizes.
- Special design of roller balance adjustment
- No scorched fabrics
- Top quality components
- Low and easy maintenance

TECHNOLOGY




FABRIC CUTTING AND WELDING

Second step: reinforcement taping with MX 210



FABRIC CUTTING AND WELDING - DECORATIVE WHEEL



For fabrics that don't need reinforcement taping



FABRIC CUTTING.

When a perfect clean cut is needed.

APPLICATIONS



ULTRASONIC MACHINE . NOSO MU 280

BASE MACHINE DESCRIPTION

- .weld & cut roller
- .white table with beech borders 120x60x4
- .table support structure
- .pedals
- .16A 3 poles socket
- .manual

TECHNICAL INFO FOR INSTALLATION

Dimension and weight

550 x 1200 x H 1020 mm - 140 kg

Pneumatic connection - all connections on the left side

Fast junction diam 8 mm

Input air pressure: 5.5 bar (0.55 MPa)

Air quality: **dry air**

Electric connection

Nominal voltage: 230 Vac

Nominal frequency: 50 Hz / 60 Hz

Nominal power requirements: 220 V 6A 1P

The machines complies to technical rulings: Machinery Directive 2006/42/CE, Electromagnetic Compatibility CEE 2004/108/CE and CEI EN 60204-1:2006, UNI EN 61000-6-2:2005, UNI EN 61000-6-4:2007/A1:2011, Low Tension Directive 2006/95/CE, UNI EN ISO 12100:2010.

FRAMISITALIA
ITALY · HONG KONG · USA